

Highway Information Seminar November 16, 2017 Max G. Grogg, FHWA

## Agenda

- HPMS Pavement Data Report Card (PRC)
  - User Manual
  - Updates to the PRC
  - How are we doing



## Key Acronyms

- CRCP: Continuously Reinforced Concrete Pavement
- HPMS: Highway Performance Monitoring System
- IRI: International Roughness Index
- JCP: Jointed Concrete Pavement
- LRS: Linear Referencing System
- NHS: National Highway System
- PRC: HPMS Pavement Data Report Card
- PSR: Present Serviceability Rating
- TPM: Transportation Performance Management

## **User Manual**

| HPMS 8.0.1                       |              | DATA CHECK AND PAVEMENT DATA QUANTITY (INTERSTATE) |   | a: Raview<br>: 2016<br>: 99 - UTOPIA<br>: 05/04/2017 | Comment [MGG56]: Page 3 of the PRC fluoress on missing data; both geometric and paverneril distress |   |
|----------------------------------|--------------|--|---|--|---|---|
| DATA CHECK                       |              |  |   |  |   |   |
| FIPS CODE                        | 99           | STATE NAME   | UTOPIA  | STATEABBREVIATION                                    | UP  |   |
| YEAR 2015 HM-41                  | INTERSTATE   | CENTERLINE MILE                                    | s   |  | 901.036   | Comment [MGGSF]: Interstate centerfine roles based on previous  |
| SUBMITTED DATE                   | A INTERSTAT  | E CENTERLINE MILE                                  | s   |  | 951.039   | year's submission as reported in Table HM-43.   |
| DELTA                            |              |  |   |  | 0.000   | Comment [MGGSR]: Interstate sententire roles from submitted data.   |
| YEAR 2015 HM-40                  | INTERSTATI   | LANE MILES   |   |  | k,140.570   | Comment [MGG19]: Tgriffunit vertelline should be investigated and<br>explained in submission comments.  |
| SUBMITTED DAT                    | AINTERSTAT   | E LANE MILES                                       |   |  | k,140.57d   | Comment [MGG20]: Tigriffuent verlations should be investigated and explained in submission comments.  |
| DELTA                            |              |  |   |  | pood  | Comment [MGG21]: Interstate lane rolles based on previous year's  |
| TOTAL INTERSTA                   | ATE LANE MIL | ES FULL EXTENT EX                                  | ICLUDING SECTIONS CODED AS A BRIDGE   |  | 4,000.014   | submission as reported in Table NM-CI  Comment (MGG22): Interstate lane roles from submitted data.  |
| DATA QUANT                       | TTV DAVIS    | MENT   |   |  |   |   |
|                                  |              |  | SSING CRACKING PERCENT DATA FROM SURFACE_TYP                                    | E DETRACTION OF AND 40 AND EXCULP                    | NG.   | Comment [MGG23]: Spriftunit variations should be investigated and<br>explained in submission comments.  |
| SECTIONS CODE                    | DAS BRIDGE   | S - MARKED AS UN                                   | RESOLVED DATA   |  | 47.952  | Comment [MGG24]: This is the expected value of lare rittle that will  |
| TOTAL INTERSTA<br>BRIDGES - MARK |              |  | SSING FAULTING DATA FROM PCC PAVEMENTS AND EX                                   | CLUDING SECTIONS CODED AS                            | 0.000   | be rated as Sood-Pair-Poor on page 1. Exceptions would be the State has<br>surface types of unpreed or other.                                   |
|                                  |              | ES PULL EXTENT W<br>S - MARKED AS UN               | HERE IRI DATA IS NULL OR ZERO FROM SURFACE_TYPE<br>RESOLVED DATA                | BETWEEN 2 AND 10 AND EXCLUDIN                        | 0.000   |   |
|                                  |              |  | HERE IRI COLLECTION DATE NOT VALID FROM SURFACE<br>RIED AS UNRESOLVED DATA      | TYPE BETWEEN 2 AND 10 AND                            | 0.000   |   |
| TOTAL INTERSTA<br>- MARKED AS UN |              |  | SSING RUTTING DATA FROM AC PAVEMENTS AND EXCL                                   | UDING SECTIONS CODED AS BRIDG                        | 0.000   | Comment [MGG25]: These five rows liberally lane miles of pevernent  |
| LANE MILES FUL                   | LEXTENT SU   | REACE TYPE IS NUL                                  | LAND EXCLUDING SECTIONS CODED AS BRIDGES - MAR                                  | RIED AS UNRESOLVED DATA                              | 1,763.727   | where required povernent distress data is missing or invalid  |
| LANE MILES FUL                   | LEXTENT SU   | REACE TYPE = 1 UN                                  | SURFACED AND EXCLUDING SECTIONS CODED AS BRID                                   | GES-MARKED AS UNRESOLVED DA                          | TA 0.000  | Comment [MGG26]: tare ribes where surface type is NULL and rating<br>cannot be determined. Previously, surface type was only required on        |
| LANE MILES FUL                   | LEXTENT SU   | REACE TYPE - 11 O                                  | THER AND EXCLUDING SECTIONS CODED AS BRIDGES -                                  | MARKED AS UNRESOLVED DATA                            | 0.000   | samples. 20 CPE 600 requires surface type as full extent on the NHS.  |
| LANE MILES FUL                   | LEXTENT SU   | REACE TYPE IS AC                                   |   |  | 1,416.755   | Comment [MGG27]: Unpeval surface type is not an acceptable value  |
| LANE MILES FUL                   | LEXTENT SU   | REACE TYPE IS PO                                   |   |  | 679.632   | for the intension   |
|                                  |              | REACE TYPE IS ORO                                  |   |  | 0.000   | Comment [HGG28]: Serendrate on Surface_Type = 11, Other   |
|                                  |              |  | SHLANES IS CODED AS A 1,2, OR 3, ALTHOUGH THIS IS P<br>TONS SHOULD BE VERIFIED. | OSSIBLE AT INTERSTATE TERMINAL                       | [2:064]   | Comment [MGG29]: This and following two rows quantity tane roles<br>by surface type.  |
| TOTAL CENTERL                    | INE MILES W  | HERE THROUGH U.A.                                  | NES IS MISSING - MARKED AS UNRESOLVED DATA                                      |  | 0.000   | Constreet [MGG30]: ter endrate  |
| ITEMS SHADED O                   | PRANGE ARE   | HPMS PAVEMENT P                                    | ERFORMANCE DATA IMPROVEMENT ZONES WHERE DAT                                     | TA SHOULD BE VERIFIED OR CORRE                       | CTED  | Comment (MGG31): Through large are required for all section of the<br>makings per 20 CFS 690. Any value greater than 0.0000 is a or that error. |



# Updates to PRC

- Updates reflect Performance Management Final Rule
  - Full extent (required; 23 CFR 490.307 & 490.309)
  - Missing or invalid data (no more than 5%; 23
     CFR 490.313)
- Planned updates
  - Link to standard operating procedures calculations
    - Spatial alignment
    - Present Serviceability Rating (PSR)



### 2016 Interstate


- 39 States were on time
- 35 States had less than 5.0% missing data
- 20 States had less than 5.0% missing or invalid data
- Unresolved data comments in HPMS software forwarded to states

### FULL EXTENT LANE MILES RATING (INTERSTATE)

Stage: Year: Review 2016 99 - UTOPIA 05/09/2017

State: Date:


| LANE MILES FULL EXTENT GOOD  | 367.700   |
|--|-----------|
| LANE MILES FULL EXTENT FAIR  | 1,012.884 |
| LANE MILES FULL EXTENT POOR  | 8.680     |
| TOTAL  | 1,389.264 |
| ESTIMATED TOTAL INTERSTATE LANE MILES MISSING OR INVALID DATA                | 3,942.812 |
| % ESTIMATED TOTAL INTERSTATE LANE MILES MISSING OR INVALID DATA - LIMIT 5.0% | 73.95 %   |
| SAMPLE SIZE  | 26.13 %   |
| % SURFACE TYPE BETWEEN 2 AND 10 RATED AS G-F-P                               | 95.81 %   |

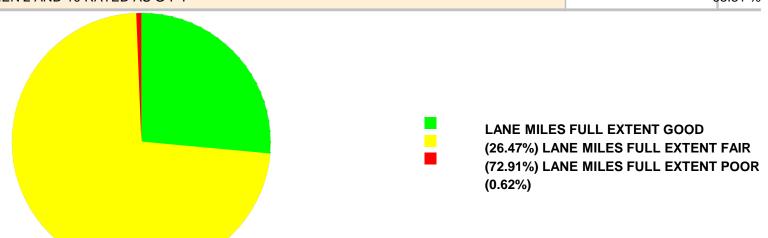


THE HPMS PAVEMENT REPORT CARD'S PURPOSE IS TO PROVIDE FEEDBACK TO DIVISIONS AND STATES ON THEIR HPMS PAVEMENT SUBMITTAL DATA IN RESPONSE TO REQUIREMENTS OF 23 CFR 490. THE REPORT CARD IS FOR INFORMATION ONLY AND SHOULD NOT BE CONSIDERED THE OFFICIAL CALCULATION OF MEASURES OR MISSING OR INVALID DATA FOR A STATE.

BASED ON 23 CFR 490 THE REPORT CARD IS ANALYZING FULL EXTENT, NOT SAMPLE BASED, PAVEMENT DATA. STATES ARE ENCOURAGED TO SUBMIT FULL EXTENT DATA PRIOR TO ITS REQUIREMENT SO THEY CAN BETTER ASSESS THEIR DATA SUBMISSION.


### 2016 INTERSTATE G-F-P

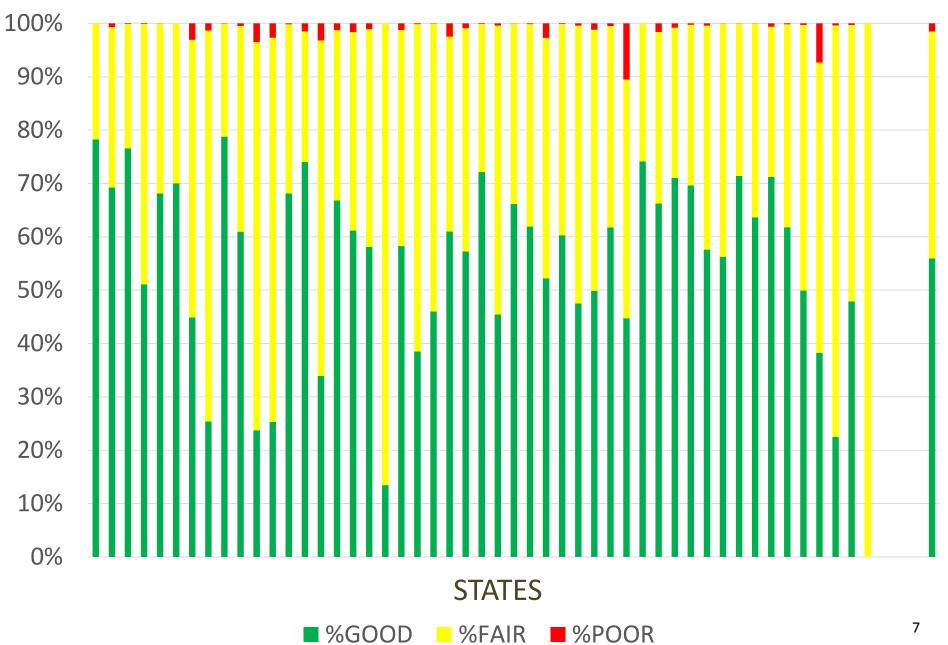

# INTERSTATE % POOR AND MISSING SURFACE TYPE

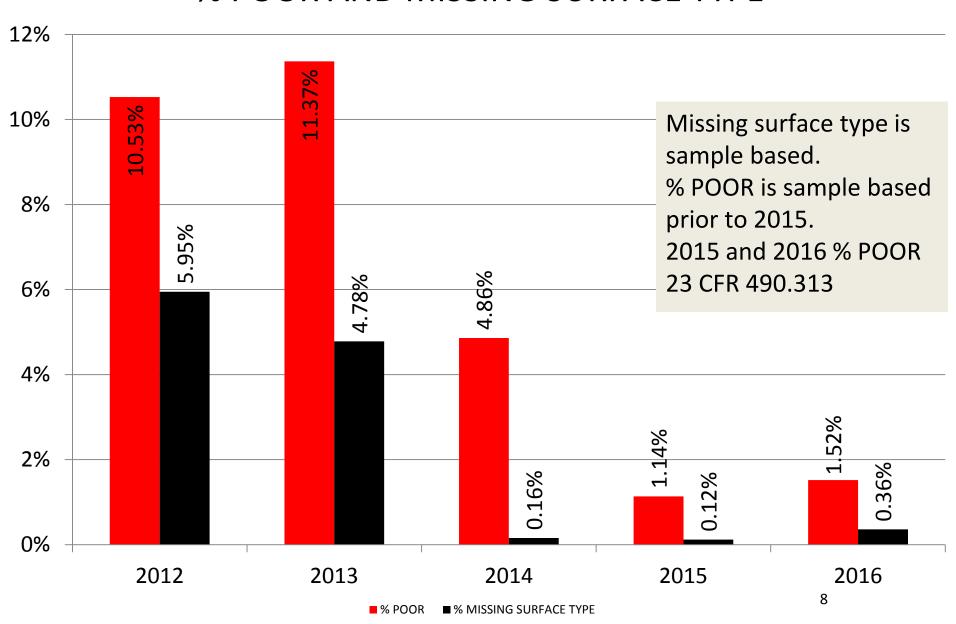

### % MISSING OR INVALID

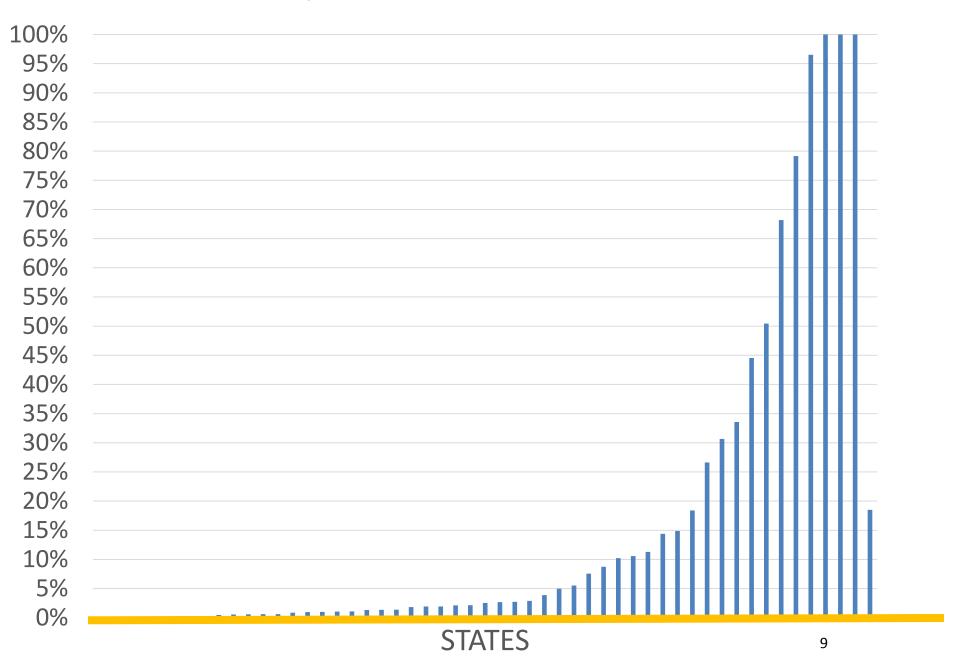

### HPMS 8.0.1 DATA CHECK AND PAVEMENT DATA QUANTITY (INTERSTATE)

 Stage:
 Review 2016

 Year:
 99 - UTOPIA

 State:
 05/09/2017

Date:

#### **DATA CHECK**

| FIPS CODE       | 99            | STATE NAME                            | UTOPIA STATE ABBREVIATION   |         | UF   |
|-----------------|---------------|---------------------------------------|---|---------|------|
|                 |               |                                       |   |         |      |
| YEAR 2015 HM-41 | INTERSTATE (  | CENTERLINE MILES                      |   | 1,104.3 | 300  |
| SUBMITTED DATA  | INTERSTATE (  | CENTERLINE MILES                      |   | 1,181.  | 590  |
| DELTA           |               |                                       |   | 77.     | .290 |
| YEAR 2015 HM-43 | INTERSTATE L  | ANE MILES                             |   | 5,179.4 | 415  |
| SUBMITTED DATA  | INTERSTATE I  | ANE MILES                             |   | 5,508.0 | 695  |
| DELTA           |               |                                       |   | 329.    | 280  |
| TOTAL INTERSTAT | ΓE LANE MILES | FULL EXTENT EXCLU                     | IDING SECTIONS CODED AS A BRIDGE  | 5,332.0 | 076  |
| DATA QUANTI     | TY - PAVEM    | ENT                                   |   |         |      |
|                 |               | FULL EXTENT MISSINAS UNRESOLVED DAT   | NG CRACKING PERCENT DATA FROM SURFACE_TYPE BETWEEN 2 AND 10 AND EXCLUDING SECTIONS A                | 59.     | 608  |
| TOTAL INTERSTAT |               | FULL EXTENT MISSI                     | NG FAULTING DATA FROM PCC PAVEMENTS AND EXCLUDING SECTIONS CODED AS BRIDGES - MARKED                | 0.      | .000 |
|                 |               | FULL EXTENT WHER<br>S UNRESOLVED DAT  | E IRI DATA IS NULL OR ZERO FROM SURFACE_TYPE BETWEEN 2 AND 10 AND EXCLUDING SECTIONS<br>A           | 1.      | .200 |
|                 |               | FULL EXTENT WHER - MARKED AS UNRES    | E IRI COLLECTION DATE NOT VALID FROM SURFACE_TYPE BETWEEN 2 AND 10 AND EXCLUDING DLVED DATA         | 1.      | .200 |
| TOTAL INTERSTAT |               |                                       | NG RUTTING DATA FROM AC PAVEMENTS AND EXCLUDING SECTIONS CODED AS BRIDGES                           | 0.      | .000 |
| LANE MILES FULL | EXTENT SURF   | ACE TYPE IS NULL AN                   | ND EXCLUDING SECTIONS CODED AS BRIDGES - MARKED AS UNRESOLVED DATA                                  | 3,882.0 | 004  |
| LANE MILES FULL | EXTENT SURF   | ACE TYPE = 1 UNSUR                    | FACED AND EXCLUDING SECTIONS CODED AS BRIDGES - MARKED AS UNRESOLVED DATA                           | 0.      | .000 |
| LANE MILES FULL | EXTENT SURF   | ACE TYPE = 11 OTHE                    | R AND EXCLUDING SECTIONS CODED AS BRIDGES - MARKED AS UNRESOLVED DATA                               | 0.      | .000 |
| LANE MILES FULL | EXTENT SURF   | ACE TYPE IS AC                        |   | 1,390.4 | 464  |
| LANE MILES FULL | EXTENT SURF   | ACE TYPE IS PCC                       |   | 59.     | 608  |
| LANE MILES FULL | EXTENT SURF   | ACE TYPE IS CRCP                      |   | 0.      | .000 |
|                 |               | WHERE THROUGH LA<br>ECTIONS SHOULD BE | ANES IS CODED AS A 1,2, OR 3. ALTHOUGH THIS IS POSSIBLE AT INTERSTATE TERMINAL SECTION OR VERIFIED. | 1.      | .980 |
| TOTAL CENTERLIN | NE MILES WHE  | RE THROUGH_LANES                      | IS MISSING - MARKED AS UNRESOLVED DATA  | 0.      | .000 |

### PAVEMENT DATA QUALITY – IRI (INTERSTATE)

 Stage:
 Review 2016

 Year:
 99 - UTOPIA

 State:
 05/09/2017

Date:

| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE IRI COLLECTION DATE NOT VALID FROM SURFACE_TYPE BETWEEN 2 AND 10 AND EXCLUDING SECTIONS CODED AS BRIDGES - MARKED AS UNRESOLVED DATA. IRI DATA IS REQUIRED TO BE COLLECTED AND REPORTED ANNUALLY ON THE INTERSTATE ALONG WITH THE DATE OF COLLECTION. IRI COLLECTION YEAR SHOULD EQUAL YEAR_RECORD | 1.200  |
|--|--------|
| % INTERSTATE LANE MILES FULL EXTENT IRI COLLECTION YEAR DOES NOT EQUAL YEAR_RECORD. CUTOFF VALUE TO FLAG FOR VERIFICATION IS 0.00%   | 0.08 % |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE IRI DATA IS NULL OR ZERO FROM SURFACE_TYPE BETWEEN 2 AND 10 AND EXCLUDING SECTIONS CODED AS BRIDGES - MARKED AS UNRESOLVED DATA  | 1.200  |
| % INTERSTATE LANE MILES FULL EXTENT WHERE IRI DATA IS NULL OR ZERO. CUTOFF VALUE TO FLAG FOR VERIFICATION IS 0.00%   | 0.08 % |
| FULL EXTENT LANE MILES WITH MISSING OR INVALID IRI, FROM SURFACE_TYPE BETWEEN 2 AND 10 AND EXCLUDING SECTIONS CODED AS BRIDGES   | 1.200  |
| % FULL EXTENT LANE MILES MISSING OR INVALID IRI EXCLUDING SECTIONS CODED AS BRIDGES - SIP SP5  | 0.08 % |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE IRI IS LESS THAN 30.0 INCHES/MILE. ALTHOUGH VALUES LESS THAN 30.0 INCHES PER MILE ARE POSSIBLE THEY ARE NOT LIKELY AND SHOULD BE VERIFIED. YOU MAY WISH TO REFER TO THE ATTACHED IRI CUMULATIVE DISTRIBUTION.  | 85.744 |
| % INTERSTATE LANE MILES FULL EXTENT IRI LESS THAN 30.0 INCHES PER MILE. AVERAGE VALUE IS 1.23%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 0.00%   | 5.91 % |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE IRI IS GREATER THAN 400.0 INCHES/MILE. ALTHOUGH VALUES GREATER THAN 400.0 INCHES PER MILE ARE POSSIBLE THEY ARE NOT LIKELY AND SHOULD BE VERIFIED. YOU MAY WISH TO REFER TO THE ATTACHED IRI CUMULATIVE DISTRIBUTION.  | 0.120  |
| % INTERSTATE LANE MILES FULL EXTENT IRI GREATER THAN 400.0 INCHES PER MILE. AVERAGE VALUE IS 0.0%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 0.00%  | 0.01 % |
| LANE MILES FULL EXTENT GOOD BASED ON PSR WHERE IRI IS NULL   | 0.000  |
| LANE MILES FULL EXTENT POOR BASED ON PSR WHERE IRI IS NULL   | 0.000  |
|  |        |

### PAVEMENT DATA QUALITY – CRACKING PERCENT (INTERSTATE)

Stage: Year:

Review 2016 99 - UTOPIA 05/09/2017

State: Date:

| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE CRACKING PERCENT IS REPORTED AS 0.00%. MULTIPLE STATES REPORTED VERY HIGH VALUES FOR THEIR PAVEMENTS AND THESE SHOULD BE VERIFIED. YOU MAY WISH TO REFER TO THE ATTACHED CRACKING PERCENT CUMULATIVE DISTRIBUTION.   | 766.642 |
|--|---------|
| % INTERSTATE LANE MILES FULL EXTENT WHERE CRACKING PERCENT IS REPORTED AS 0.00%. AVERAGE IS 61.79% WITH A SD OF 26.02%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 87.82%  | 52.87 % |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE CRACKING PERCENT IS REPORTED > 0.00% AND < 1.00%. THIS MAY BE AN INDICATION THAT A STATE MAY HAVE A PROBLEM CONVERTING DECIMAL TO PERCENTAGES. CRACKING PERCENT IS TO BE REPORTED WITH A PRECISION OF 1.00% OR LESS. MULTIPLE STATES REPORTED VERY HIGH VALUES FOR THEIR PAVEMENTS AND THESE SHOULD BE VERIFIED. | 153.831 |
| % INTERSTATE LANE MILES FULL EXTENT WHERE CRACKING PERCENT IS REPORTED > 0.00% AND < 1.00%. AVERAGE IS 9.53% WITH A SD OF 17.26%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 26.79%  | 10.61 % |
| TOTAL INTERSTATE LANE MILES FULL EXTENT FOR PAVEMENTS CODED AS HMA WHERE CRACKING PERCENT IS REPORTED GREATER THAN 54.00%. CRACKING PERCENT FOR HMA IS LIMITED TO WHEELPATH AND THEREFORE SHOULD NOT EXCEED 54.00% FOR A 12-FOOT LANE WIDTH. MULTIPLE STATES REPORTED VERY HIGH VALUES FOR THEIR PAVEMENTS AND THESE SHOULD BE VERIFIED.                       | 7.084   |
| % INTERSTATE LANE MILES FULL EXTENT FOR HMA PAVEMENTS WHERE CRACKING PERCENT IS REPORTED GREATER THAN 54.00%. AVERAGE IS 0.29% WITH A SD OF 0.46%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 0.00%  | 0.51 %  |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE CRACKING PERCENT IS REPORTED AS 100.00%. MULTIPLE STATES REPORTED VERY HIGH VALUES FOR THEIR PAVEMENTS AND THESE SHOULD BE VERIFIED. YOU MAY WISH TO REFER TO THE ATTACHED CRACKING PERCENT CUMULATIVE DISTRIBUTION.   | 0.000   |
| % INTERSTATE LANE MILES FULL EXTENT WHERE CRACKING PERCENT IS REPORTED AS 100.00%. AVERAGE IS 0.16% WITH A SD OF 0.65%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 0.81%   | 0.00 %  |
| TEMO CHARES OF ANOTARE LINES BAVENEUT PERFORMANCE DATA IMPROVEMENT TONICO WILEDE DATA CHOULD BE VERIEUR OF CORDICATE   |         |

### PAVEMENT DATA QUALITY - FAULTING AND RUTTING (INTERSTATE)

 Stage:
 Review 2016

 Year:
 99 - UTOPIA

 State:
 05/09/2017

State: Date:

| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE SURFACE TYPE IS JOINTED PCC AND FAULTING IS EQUAL TO 0.00. MULTIPLE STATES REPORTED VERY HIGH VALUES AND THIS DATA SHOULD BE VERIFIED. YOU MAY WISH TO REFER TO THE ATTACHED FAULTING CUMULATIVE DISTRIBUTION. | 0.000    |
|--|----------|
| % INTERSTATE LANE MILES FULL EXTENT WHERE SURFACE TYPE IS JOINTED PCC AND FAULTING IS EQUAL TO 0.00. AVERAGE IS 56.41% WITH A SD OF 36.57%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 92.98%  | 0.00 %   |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE SURFACE TYPE IS JOINTED PCC AND FAULTING IS GREATER THAN 1.00 INCH. MULTIPLE STATES  | 3.594    |
| REPORTED VERY HIGH VALUES AND THIS DATA SHOULD BE VERIFIED. YOU MAY WISH TO REFER TO THE ATTACHED FAULTING CUMULATIVE DISTRIBUTION.  |          |
| % INTERSTATE LANE MILES FULL EXTENT WHERE SURFACE TYPE IS JOINTED PCC AND FAULTING IS GREATER THAN 1.00 INCH. AVERAGE IS 0.06% WITH A SD OF 1.12%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 0.00%  | 6.03 %   |
| TOTAL INTEROTATE LANE MILEO FULL EVITENT WILEDE OUDEAGE TYPE IO LINA AND DUTTING IO FOLIAL TO A CO. MILLTIPLE OTATEO DEPONTED VERY LIGHT   |          |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE SURFACE TYPE IS HMA AND RUTTING IS EQUAL TO 0.00. MULTIPLE STATES REPORTED VERY HIGH VALUES AND THIS DATA SHOULD BE VERIFIED. YOU MAY WISH TO REFER TO THE ATTACHED RUTTING CUMULATIVE DISTRIBUTION.           | 0.000    |
| % INTERSTATE LANE MILES FULL EXTENT WHERE SURFACE TYPE IS HMA AND RUTTING IS EQUAL TO 0.00. AVERAGE IS 15.07% WITH A SD OF 23.93%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 39.00%   | 0.00 %   |
| TOTAL INTEROTATE LANE MILEO FULL EVTENT WILEDE OUDEAGE TYPE IO LINA AND DUTTING IO ODEATED THAN A GO INGLE MILETIPLE OTATED DEPODTED   | 4.700    |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE SURFACE TYPE IS HMA AND RUTTING IS GREATER THAN 1.00 INCH. MULTIPLE STATES REPORTED VERY HIGH VALUES AND THIS DATA SHOULD BE VERIFIED. YOU MAY WISH TO REFER TO THE ATTCHED RUTTING CUMULATIVE DISTRIBUTION.   | 1.700    |
| % INTERSTATE LANE MILES FULL EXTENT WHERE SURFACE TYPE IS HMA AND RUTTING IS GREATER THAN 1.00 INCH. AVERAGE IS 0.00% WITH A SD OF 0.02%, CUTOFF VALUE TO FLAG FOR VERIFICATION IS 0.00%   | 0.12 %   |
|  |          |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE RUTTING IS REPORTED ON SURFACE TYPE = PCC OR CRCP  | 59.608   |
| MANY STATES REPORT ALL DISTRESSES REGARDLESS OF SURFACE TYPE. VALUES OTHER THAN 0% SHOULD BE VERIFIED AS THIS MAY BE AN ERROR OR THE RESULT OF DIFFERENT SOURCES OF REPORTING DATA   | 100.00 % |
|  |          |
| TOTAL INTERSTATE LANE MILES FULL EXTENT WHERE FAULTING IS REPORTED ON SURFACE TYPE = HMA OR CRCP   | 0.000    |
| MANY STATES REPORT ALL DISTRESSES REGARDLESS OF SURFACE TYPE. VALUES OTHER THAN 0% SHOULD BE VERIFIED AS THIS MAY BE AN ERROR OR THE RESULT OF DIFFERENT SOURCES OF REPORTING DATA   | 0.00 %   |
|  |          |

ITEMS SHADED ORANGE ARE HPMS PAVEMENT PERFORMANCE DATA IMPROVEMENT ZONES WHERE DATA SHOULD BE VERIFIED OR CORRECTED

13

### HPMS 8.0.1 PAVEMENT DATA QUALITY - BRIDGE AND SECTION LENGTH (INTERSTATE)

**Stage:** Review 2016 **Year:** 99 - UTOPIA **State:** 05/09/2017

Date:

#### **BRIDGE LOCATION**

PER MAP-21 BRIDGES ARE EXCLUDED FROM THE PERFORMANCE MEASURE CALCULATION. THE ABILITY TO ACCURATELY LOCATE BRIDGES IN HPMS IS VERY IMPORTANT IN THE CORRECT CALCULATION OF PAVEMENT CONDITION.

| COUNT OF MAINLINE INTERSTATE BRIDGES OF DATA YEAR 2016 FROM NBI INVENTORY   | 1,282              |
|---|--------------------|
| TOTAL INTERSTATE LANE MILES OF BRIDGES OF DATA YEAR 2016 FROM NBI INVENTORY   | 194.009            |
| TOTAL LANE MILES ON FULL EXTENT BASIS CODED AS A BRIDGE IN HPMS   | 176.619            |
| PERCENT HPMS BRIDGE LANE MILES OF NBI BRIDGE LANE MILES. CUTOFF FOR VERIFICATION IS LESS THAN 90.00% OR GR 100.00%. | EATER THAN 91.04 % |

#### **SECTION LENGTH**

DISTRESS DATA SHOULD BE REPORTED IN SECTIONS 0.1 MILE IN LENGTH OR SHORTER

TOTAL INTERSTATE LANE MILES WHERE SECTION LENGTH IS GREATER THAN 0.11 MILE (0.1 MILE NOMINAL) EXCLUDING BRIDGES - MARKED AS

UNRESOLVED DATA

CUTOFF VALUE FOR VERIFICATION IS 0.00%


0.00 %

# Bridges


- MAP-21 excluded bridges from pavement performance calculation and required establishment of separate measures to assess bridge performance. [23 USC 150(c)(3)]
- NBI definition of bridges length ≥ 20 ft. [23 CFR 650.305]
- Comparing lane-miles of bridges from NBI
- Will never match 90 to 100% target
  - Definition of lanes
  - Dual carriageway
  - Border bridges
- Issues
  - HPMS error
  - NBI error
  - LRS error



# % 2015 NBI BRIDGE LANE MILES REPORTED IN HPMS

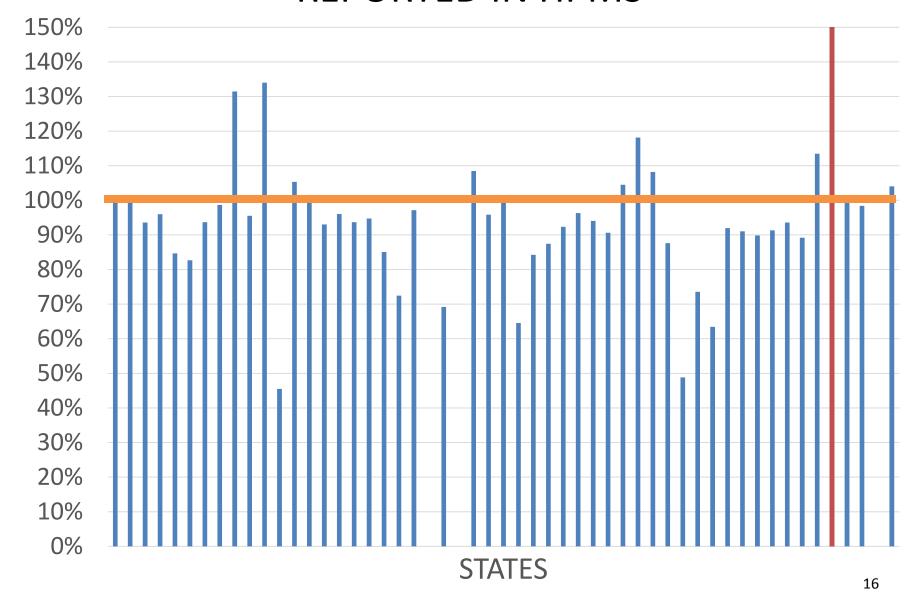

### % SECTION LENGTH EXCEEDS 0.11 MILE

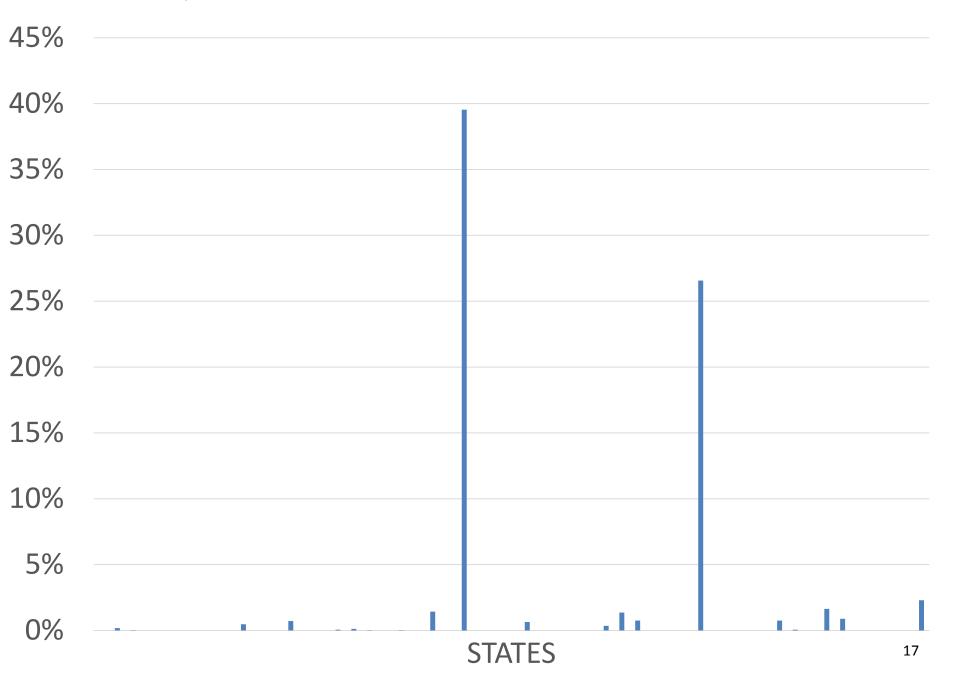

### CUMULATIVE AND FREQUENCY DISTRIBUTION – IRI (INTERSTATE)


**HPMS 8.0.1** 

 Stage:
 Review 2016

 Year:
 99 - UTOPIA

 State:
 05/09/2017

Date:

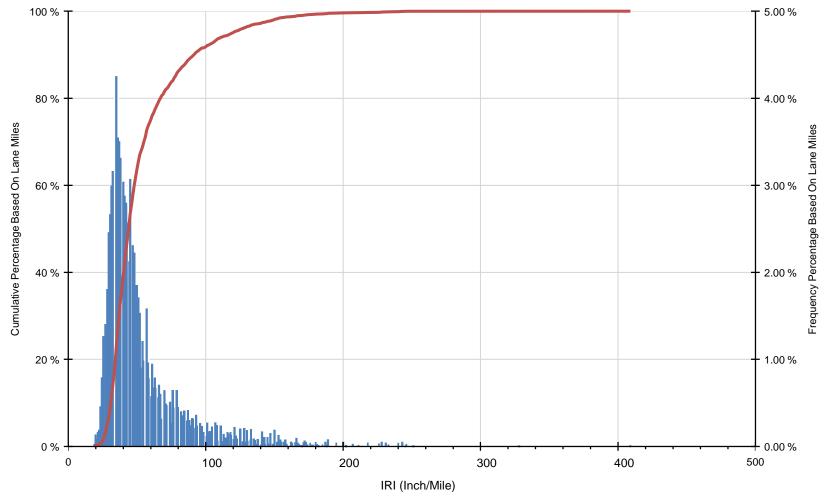


( Frequency of Missing IRI = 0.083%, missing data is included in the cumulative distribution graph.)

### CUMULATIVE AND FREQUENCY DISTRIBUTION - IRI -CLOSEUP 0 TO 400 (INTERSTATE)

Stage: Submit Year: 2015

State: 100 - ROUNDOFF

Date: 05/11/2017

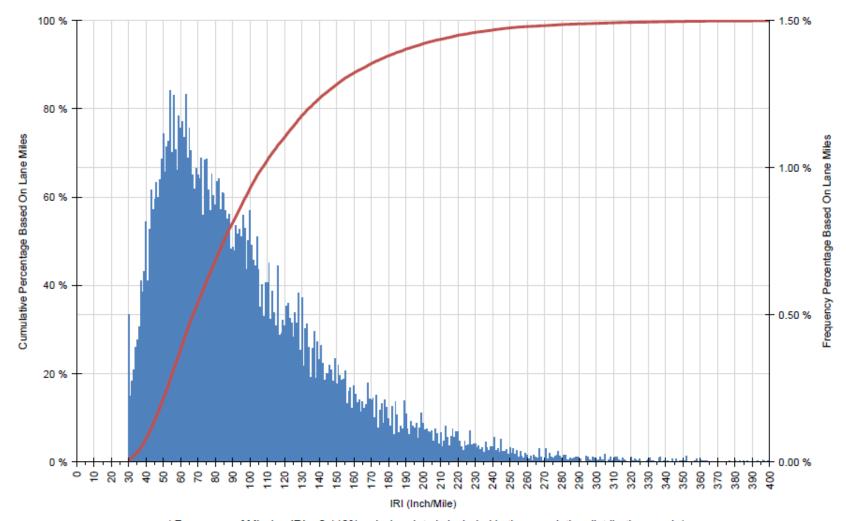

( Frequency of Missing IRI = 0.113%, missing data is included in the cumulative distribution graph.)


HPMS 8.0.1 CUMULATIVE AND FREQUENCY DISTRIBUTION - IRI (NON-INTERSTATE NHS)

Stage: Submit Year:

2015

State: 100-ROUNDOFF

Date: 05/11/2017

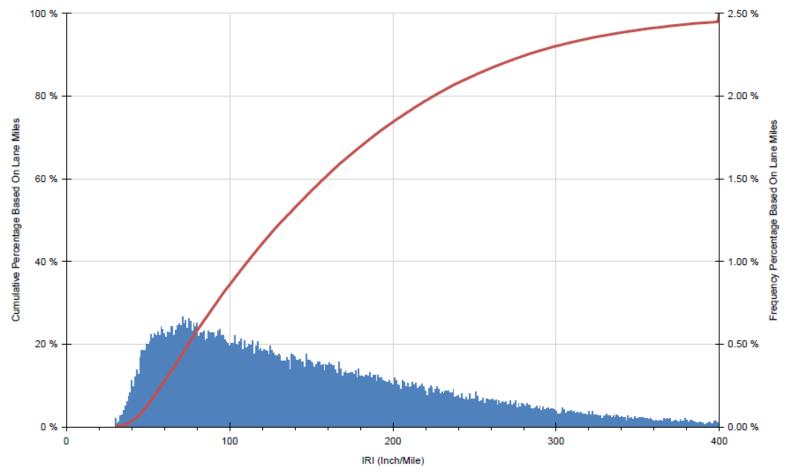


( Frequency of Missing IRI = 0.066%, missing data is included in the cumulative distribution graph.)

### CUMULATIVE AND FREQUENCY DISTRIBUTION - IRI (INTERSTATE)

Stage: Review Year: 2016

**State:** 00-DEFAULT **Date:** 04/27/2017

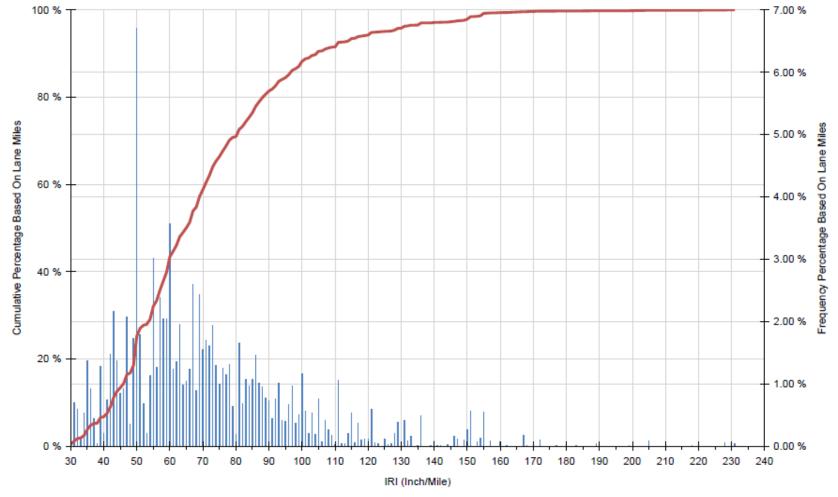

( Frequency of Missing IRI = 0.000%, missing data is included in the cumulative distribution graph.)


## HPMS 8.0.1 CUMULATIVE AND FREQUENCY DISTRIBUTION (INTERSTATE IRI COLLECTION DATES)

 Stage:
 Review 2016

 Year:
 99 - UTOPIA

 State:
 05/09/2017

Date:

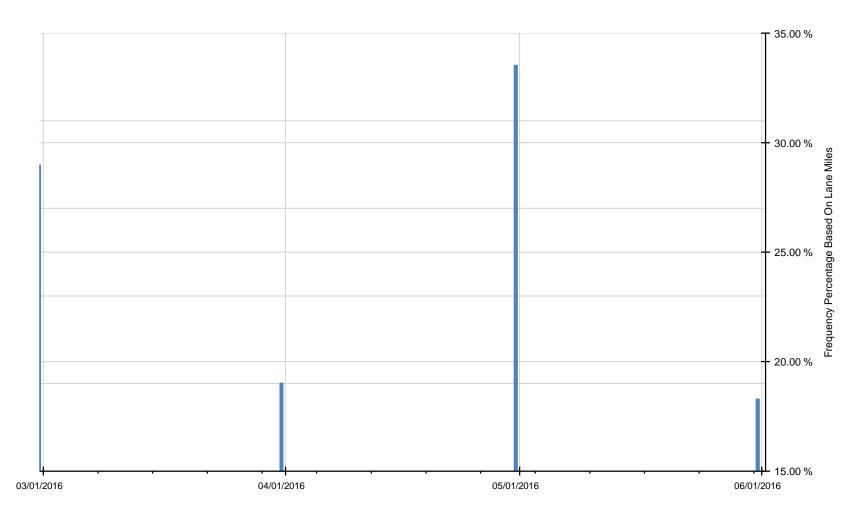


# CUMULATIVE AND FREQUENCY DISTRIBUTION (INTERSTATE IRI COLLECTION DATES)

Stage: Review Year: 2016

State: 00-DEFAULT

Date: 04/27/2017

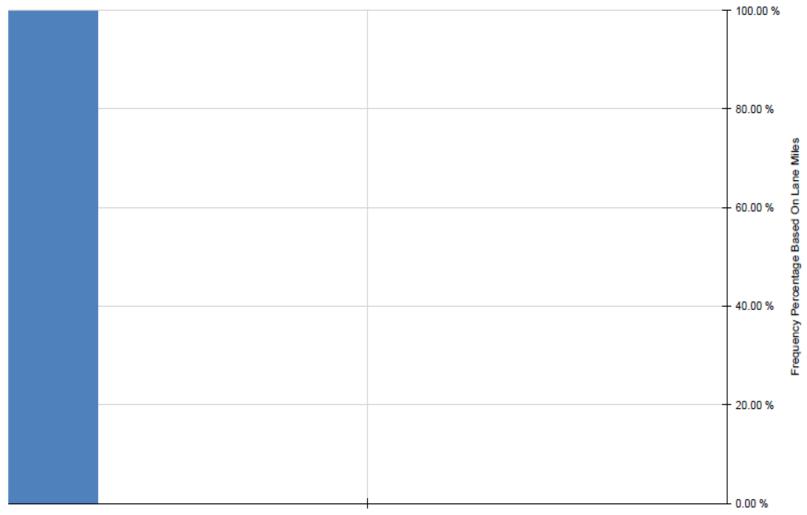


### HPMS 8.0.1 CUMULATIVE AND FREQUENCY DISTRIBUTION - CRACKING PERCENT (INTERSTATE)

 Stage:
 Review 2016

 Year:
 99 - UTOPIA

 State:
 05/09/2017

Date:

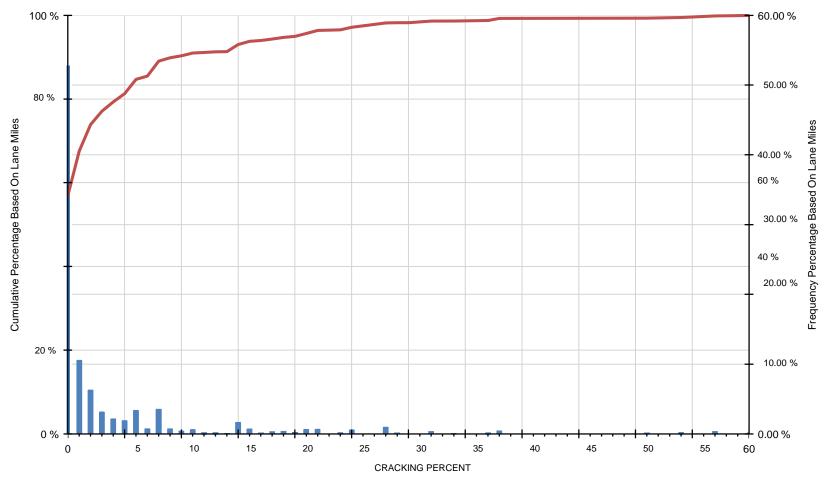

( Frequency of Missing CRACKING\_PERCENT = 4.111%, missing data is included in the cumulative distribution graph.)


HPMS 8.0.1 CUMULATIVE AND FREQUENCY DISTRIBUTION - FAULTING (INTERSTATE)

 Stage:
 Review 2016

 Year:
 99 - UTOPIA

 State:
 05/09/2017

Date:

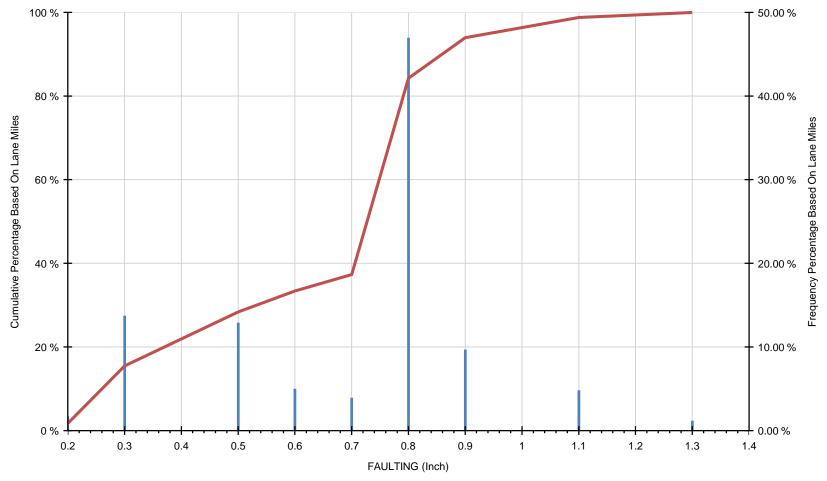


( Frequency of Missing FAULTING = 0.000%, missing data is included in the cumulative distribution graph.)

### HPMS 8.0.1 CUMULATIVE AND FREQUENCY DISTRIBUTION - FAULTING (INTERSTATE)

Stage: Submit Year: 2015


State: 98 - BLISS

Date: 05/11/2017

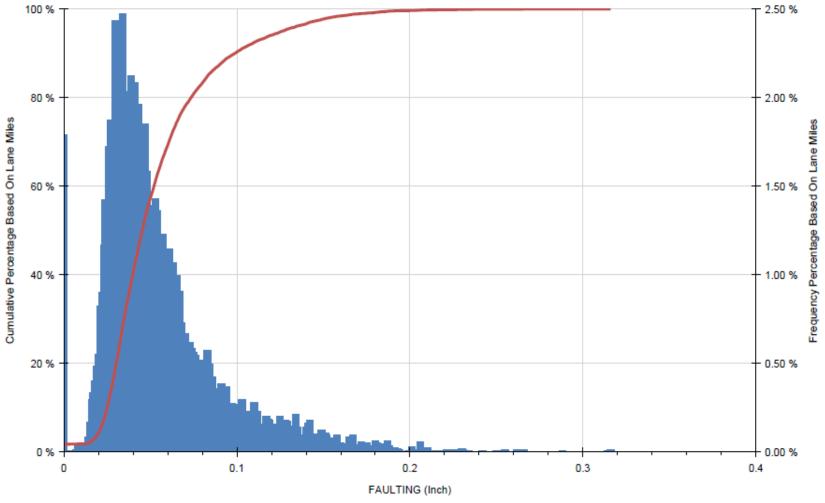

( Frequency of Missing FAULTING = 0.000%, missing data is included in the cumulative distribution graph.)

### **GROUND TRUTH**

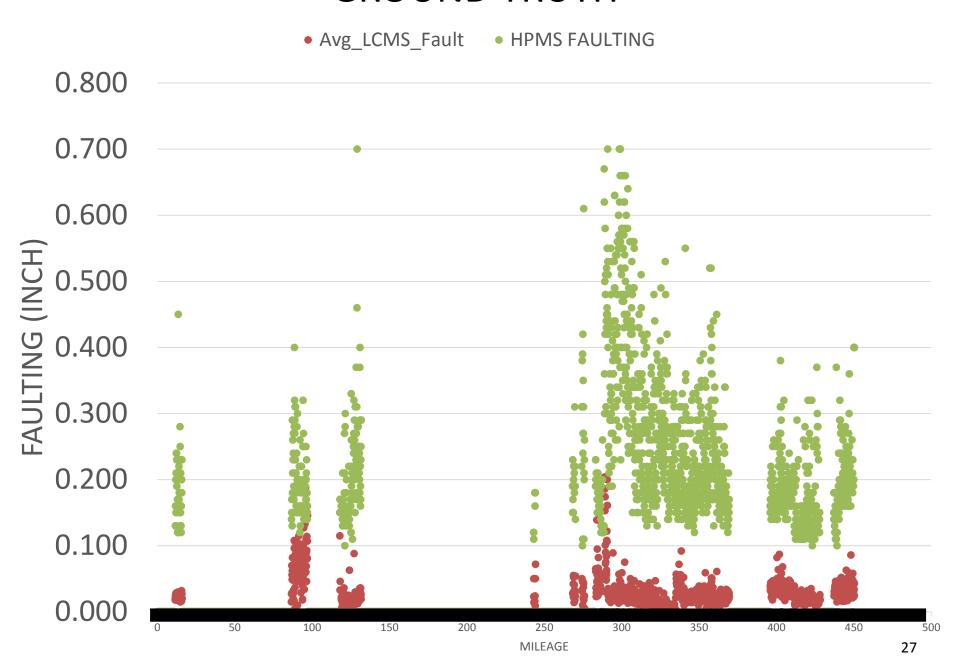


HPMS 8.0.1 CUMULATIVE AND FREQUENCY DISTRIBUTION - RUTTING (INTERSTATE)

 Stage:
 Review 2016

 Year:
 99 - UTOPIA

 State:
 05/09/2017

Date:

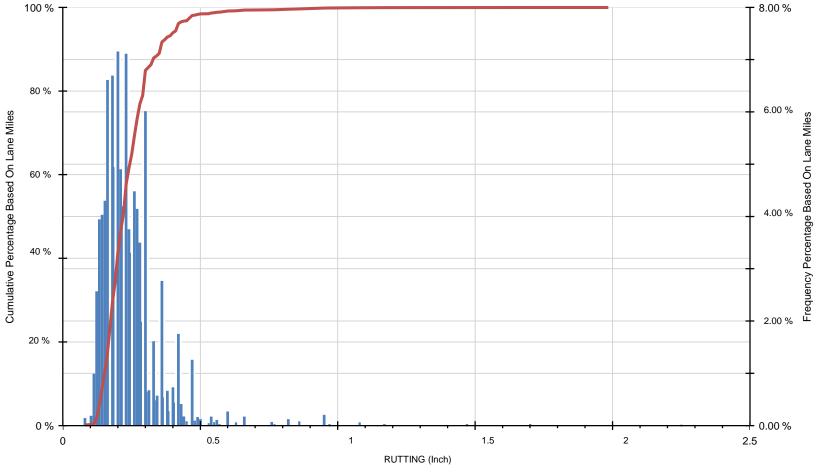

( Frequency of Missing RUTTING = 0.000%, missing data is included in the cumulative distribution graph.)


HPMS 8.0.1 CUMULATIVE AND FREQUENCY DISTRIBUTION - RUTTING (INTERSTATE)

 Stage:
 Submit

 Year:
 2015

 State:
 98-BLISS

 Date:
 05/11/2017

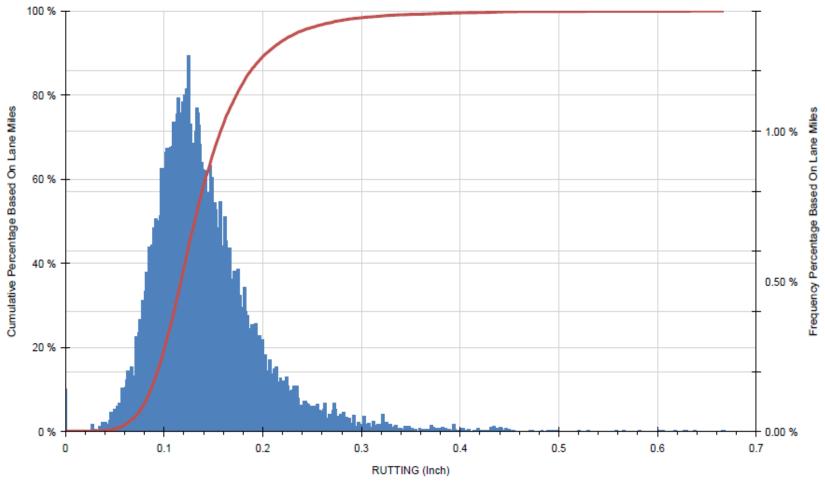


( Frequency of Missing RUTTING = 0.000%, missing data is included in the cumulative distribution graph.)


# CUMULATIVE AND FREQUENCY DISTRIBUTION - SECTION LENGTHS - CLOSEUP 0.0 TO 0.2 MILE IN LENGTH (INTERSTATE)


Stage: Review 2016 Year: 99 - UTOPIA

**State:** 05/09/2017

Date:

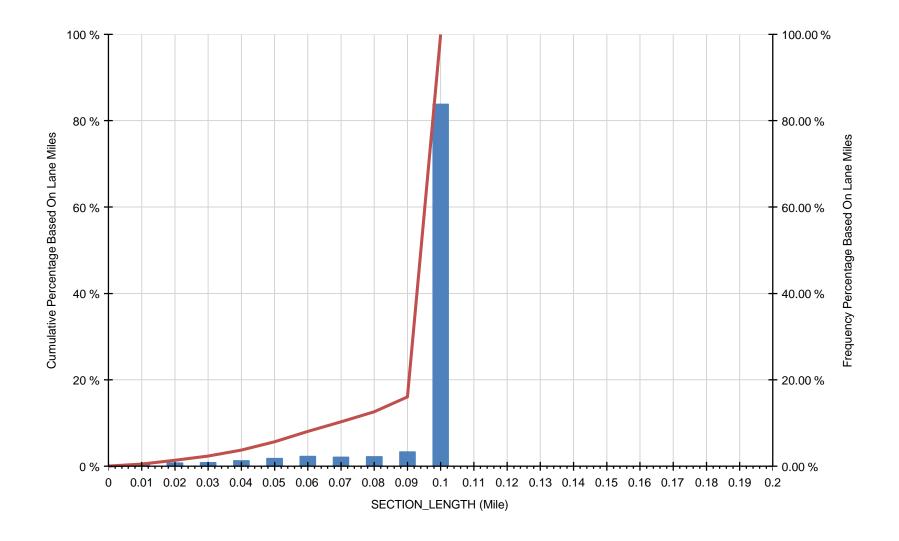

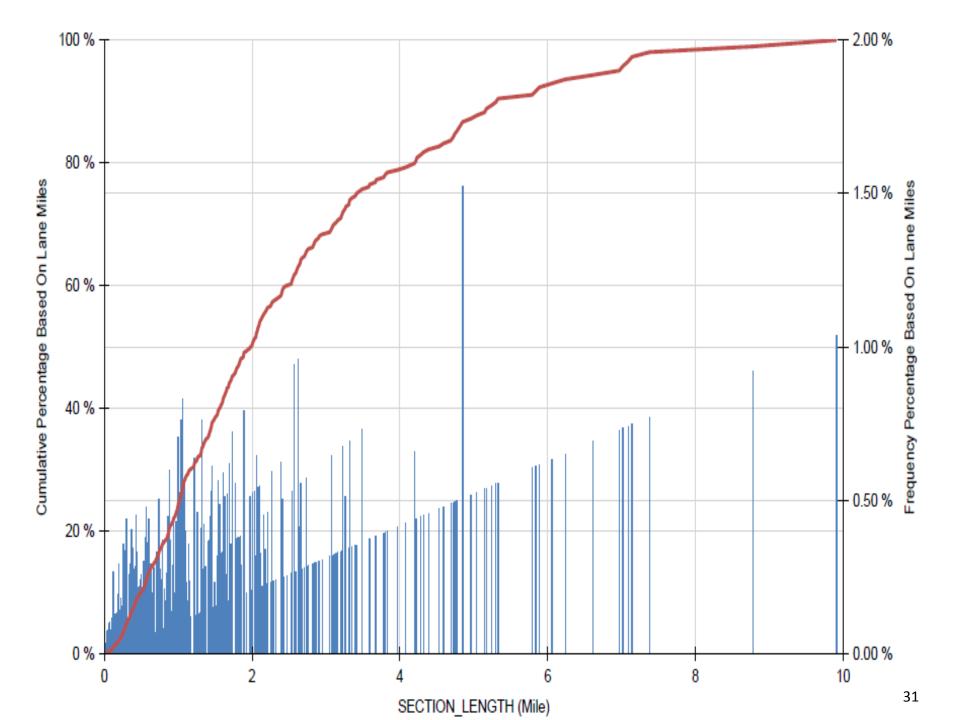

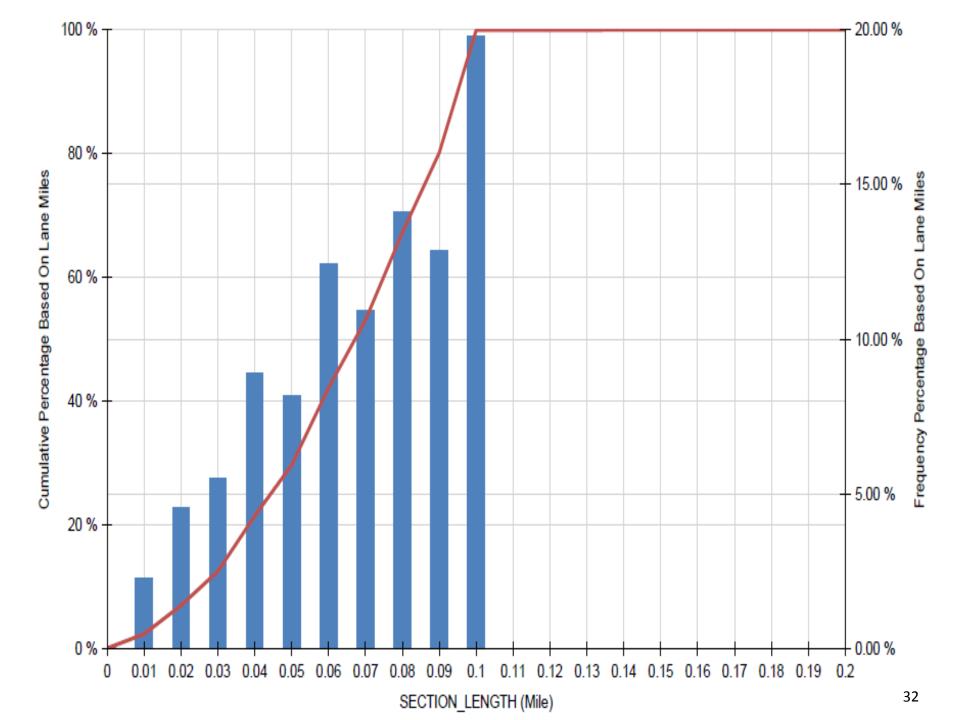

# HPMS PAVEMENT DATA REPORT CARD GOALS

- Improve HPMS Pavement Performance
  Data quality so the agency has confidence
  as we use it in performance management.
- The debate should be on the quality of the pavement, not the quality of the data.

### QUESTIONS

Max Grogg
Pavement Performance and
Implementation Engineer

max.grogg@dot.gov

515-233-7306

